



## FWFO.EWS0018 Exterior Wall Systems

[Page Bottom](#)

### FWFO - Exterior Wall Systems

[See General Information for Exterior Wall Systems](#)


### System No. EWS0018

February 19, 2015

**ASTM E2357 - 0.029 cfm/ft<sup>2</sup> (0.015 l/s•m<sup>2</sup>) @ 75 Pa (1.57 psf) - Category 1**

**ASTM E331 - 2 Hr @ 300 Pa (6.27 psf)**

**Exterior Wall System**

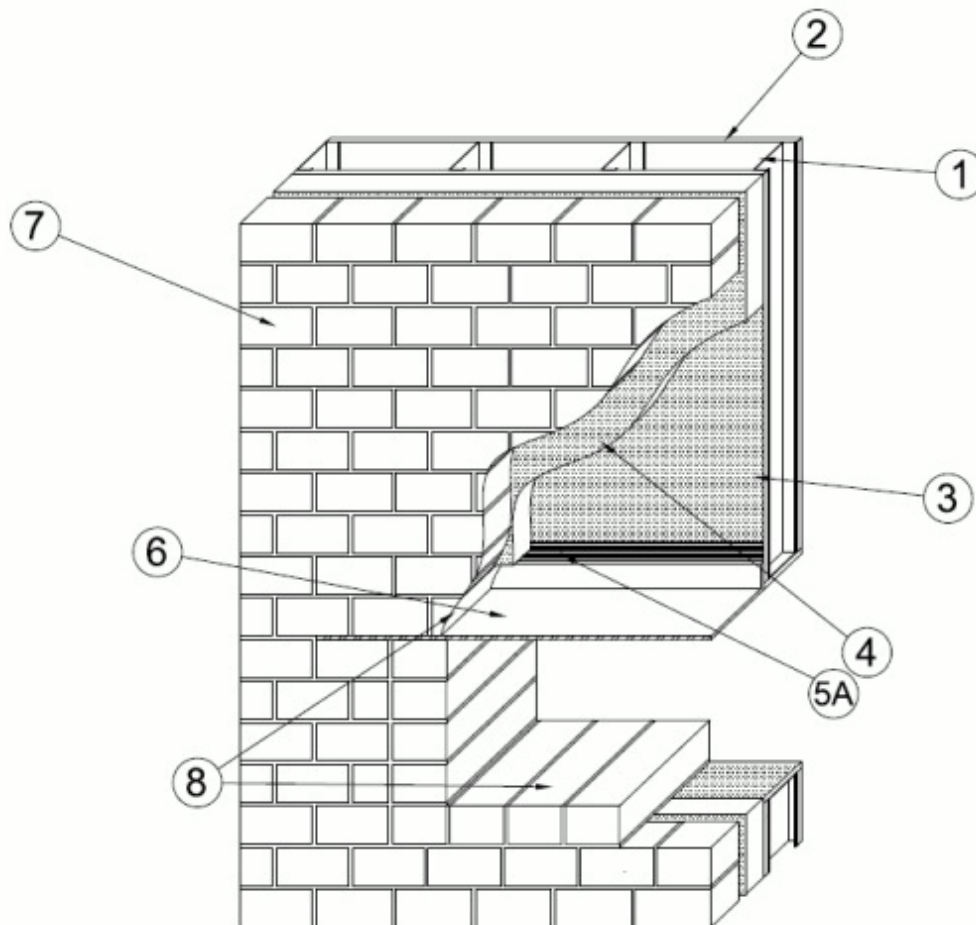

**1. Steel Studs** — Min 3-5/8 in. (92 mm) deep, formed of min 16 ga. galv steel spaced max 16 in. (406 mm) OC. Additional studs to be used to completely frame window openings.

**2. Interior Gypsum Board (BWFR)\*** — Min 5/8 in. (16 mm) thick, 4 ft (1.2 m) wide, attached to steel studs with 1 in. (25 mm) long, Type S steel screws spaced max 8 in. (203 mm) OC. Joints oriented vertically and covered with paper tape and joint compound. Screw heads covered with joint compound.

**UNITED STATES GYPSUM CO** — Type SCX

**3. Exterior Wall System Component — Exterior Gypsum Sheathing (FWFX)\*** — Exterior-grade glass mat sheathing gypsum board with air barrier sealant factory applied. Minimum 5/8 in. (16 mm) thick, attached to steel studs with 1 in. (25 mm) long, Type S steel screws spaced max 8 in. (203 mm) OC. Joints oriented vertically or horizontally. Additional sheathing to be used to line framed window openings.

**UNITED STATES GYPSUM CO** — Types USGX, SECUROCK® ExoAir® 430 Panel

**3A. Exterior Wall System Component — Sealant\*** — (Not Shown) - Sealant applied to all exterior sheathing joints.

**TREMCO INC** — Tremflex 834 or Dymonic 100

**4. Foam Insulation (BRYX)\*** — Nom 4 by 8 ft (1.2 by 2.4 m) by max 2-1/2 in. (64 mm) thick, max 1.55 pcf (24.8 kg/m<sup>3</sup>) extruded polystyrene insulation secured to gypsum sheathing with min No. 8 by 3-1/2 in. (89 mm) self-tapping steel screws in conjunction with 2 in. (51 mm) diameter steel washers.

**AFM CORP** — Foam-Control EPS Type IX, Film Faced Foam-Control EPS Type IX, Foam-Control EPS Type XIV or Foam-Control EPS Type XV

**ATLAS EPS, DIV OF ATLAS ROOFING CORP** — ThermalStar

**OWENS CORNING SCIENCE AND TECHNOLOGY, LLC** — Foamular 250 or Foamular CC

**DOW CHEMICAL CO** — Styrofoam Scoreboard

**5. Window Flashing Materials** — (Optional) - The following items may be used as window flashing materials:

**A. Exterior Wall System Component — Window Flashing Material\*** — Nom 6 in. (152 mm) wide extruded silicone rubber flashing attached to gypsum sheathing with sealant (Item 5B) to completely frame window opening.

**TREMCO INC** — Proglaze ETA

**B. Exterior Wall System Component — Sealant\*** — (Not Shown) - Sealant applied to all edges of window flashing material to adhere flashing to gypsum sheathing.

**TREMCO INC** — Spectrem 1

**6. Steel Lintel** — Nom 7 in. (178 mm) wide by min 3/8 in. (10 mm) thick steel used at top of window opening of brick veneer (Item 7) and extending min 8 in. (203 mm) beyond each side of the opening.

**7. Exterior Veneer — Brick** — Nominal 4-in.-thick clay brick offset to provide a nom 1 in. air gap between foam insulation (Item 4) and brick veneer with standard type veneer anchors spaced a max 24 in. (610 mm) on center.

**8. Brick** — Nominal 4-in.-thick clay brick installed length-wise to completely cover window opening from the exterior of the brick veneer to the interior gypsum board.

**9. Mineral Wool** — Min 4 pcf (65 kg/m<sup>3</sup>), 4 in. (102 mm) minimum thickness of mineral batt insulation installed within each wall stud cavity at each floor line held in place with any standard installation method.

**\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.**

Last Updated on 2015-02-19

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".