


Dymonic 100
 (Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

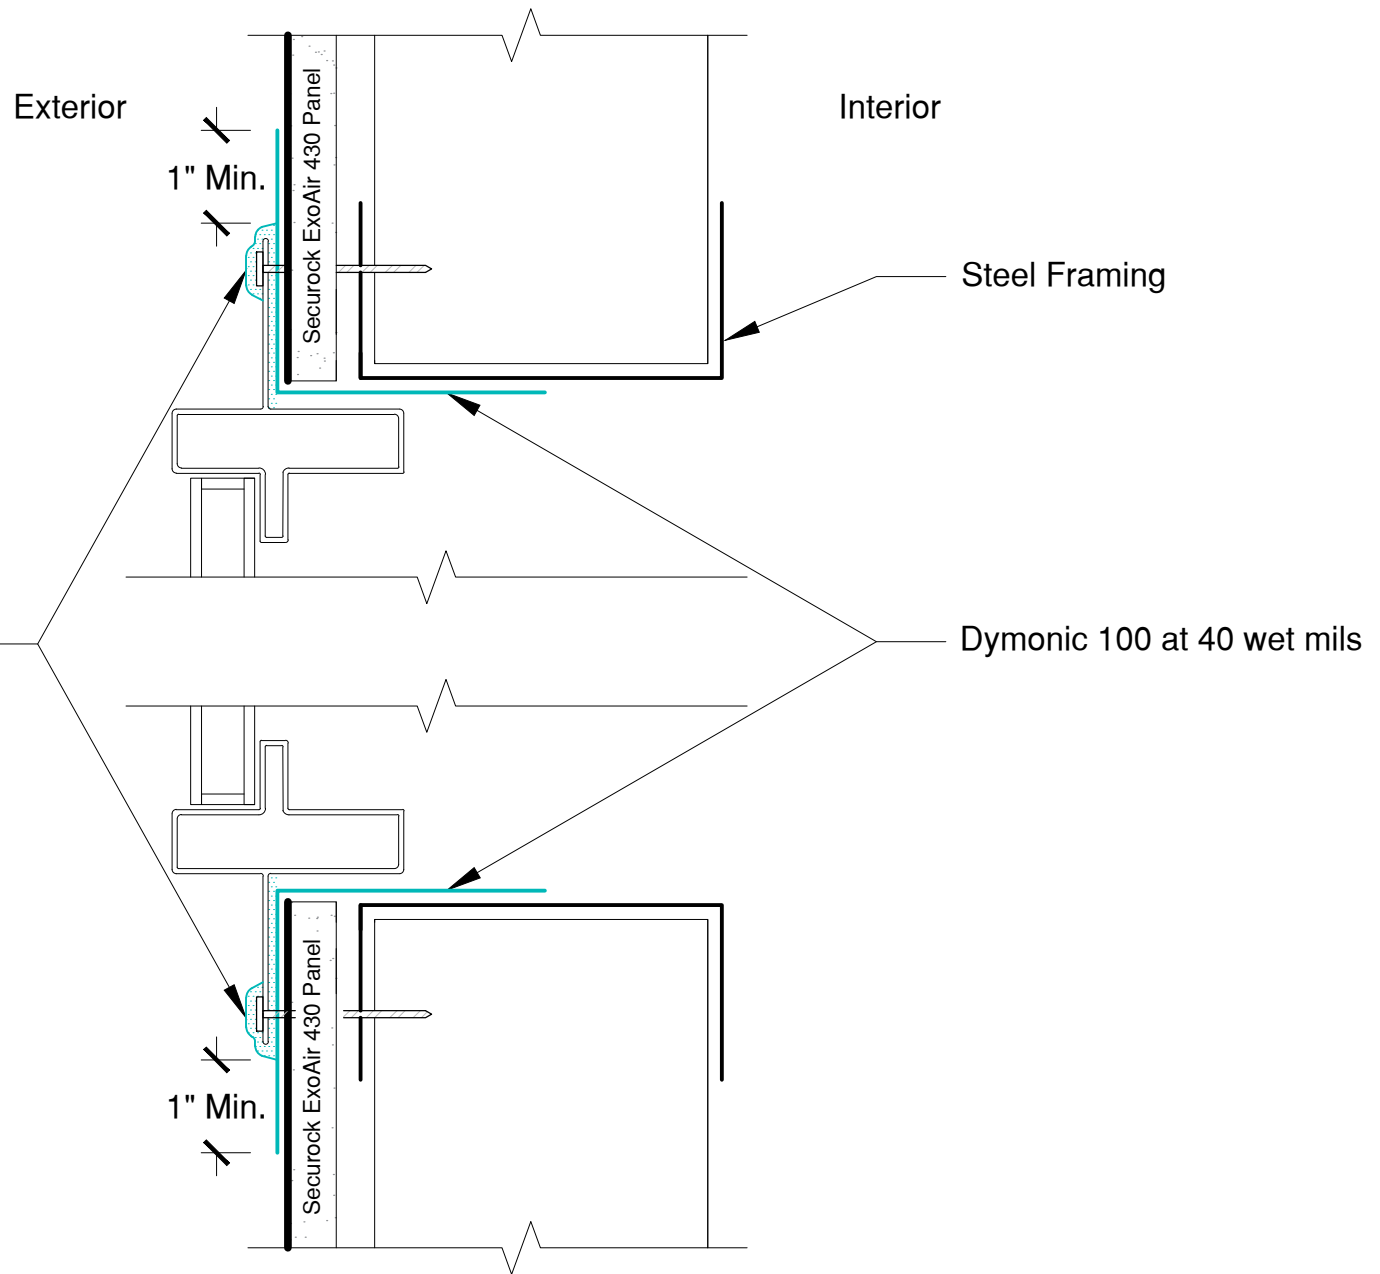

See securockexoair.com for the most up-to-date product information

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

NOTE:
 - Flashing must be installed past thermal break



United States Gypsum Company
 550 West Adams Street
 Chicago, IL 60661
 USG Technical & Customer Support:
 800.USG.4YOU (874-4968)

Tremco Commercial Sealants & Waterproofing
 3735 Green Road
 Beachwood, OH 44122
 Tremco Technical Support:
 866.209.2404

SECUROCK® ExoAir® 430 Panel
 Project:
 Detail: Nail Flange - Dymonic 100 - Framing
 Drawn by: **KAB** Approved by: **DM** Scale: NTS

File Name:
14114
 Date: 3/20/2017

Rev #
00